

AQUAFLEX 5		No	Code	Comment
	1	ENCAP-AF5-BASE	Termoconductive base	
	2	ENCAP-AF5-RESIN	Resin	
	4	LF06S-W3F-840	Osram 8mm flexible led stripe	
	5	IP67-CB2P-0,3M	Male connector with cable	
	6	IP67-CB2P-0,3F	Female connector with cable	


DO NOT BEND MORE THAT $R=20\text{CM}$ DO NOT BEND HORIZONTAL ONLY BEND VERTICAL

DO NOT TWIST

<p>1 Use thermally conductive tape</p> <p>Double sided adhesive tape</p>	<p>2 CLOSE TO CEILING AND CONNECT POWER CABLE</p>
---	--


<p>3a CLOSE</p> <p>click</p>	<p>3b OPEN</p>	<p>4 LINEAR CONNECTION</p> <p>Power supply 24V DC</p> <p>female/male connector</p>
-------------------------------------	-----------------------	---

5 Aquaflex can be connected by power cable without connectors

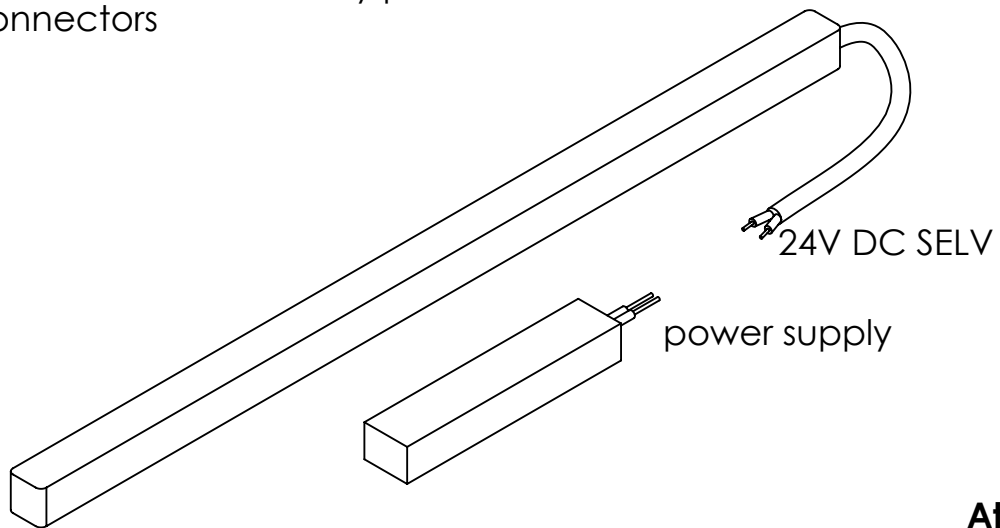


Attention:
Product can be installed by a qualified electrical only


6 AQUAFLEX CAN BE CUT INTO SHORTER STRECHES



Wrong



Good

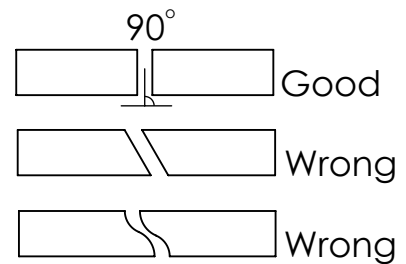

Aquaflex can be only cut with a upholstery knife under the right angle.

7 The cut site is marked on the thermoconductive side every 5cm

