

LINEARlight Colormix Flex

Flexible colored / color change LED modules



Areas of application

- Effect lighting in architecture
- Injection of light into displays and low-profile light guides
- Dynamic effects in public zones

Product family benefits

- Uniform color changing
- Great design freedom thanks to flexibility and cuttability of module
- Simple mounting and connection
- Type of protection: IP00
- Toolless connection with the optional CONNECTsystem for RGB
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back

Product family features

- Flexible and cuttable LED strip with inline multichip RGB LEDs
- RGBW all types: full single bin on each color and white
- RGB LF200C and LF05CE: binning on white (RGB mix)
- RGB LF05CA2: binning on single colors R, G, B



Product family datasheet

Technical data

Electrical data

Product description	Nominal wattage per meter - RGB	Nominal wattage per meter	Input voltage range	Accidental reverse input voltage protection up to	Nominal voltage	Nominal wattage
LF200C -G3-RGB-06 ¹⁾	2.68 / 3.1 / 0.73 W ²⁾	6.5 W	23...25 V	25 V	24.0 V	39.0 W
LF05CA2 -RGB3 ¹⁾	7.2 / 5.4 / 4.8 W ²⁾	18.0 W	23...25 V	25 V	24.0 V	72.0 W
LF05CE -RGB1	6.5 W	6.5 W	23...25 V	25 V	24.0 V	39.0 W
LF1300RGBW -G1-822-04 ¹⁾	4.7 / 4.6 / 1.7 W ²⁾	19.4 W	23...24 V	25 V	24.0 V	75.70 W
LF1300RGBW -G1-827-04 ¹⁾	4.7 / 4.6 / 1.7 W ²⁾	17.9 W	23...24 V	25 V	24.0 V	69.80 W
LF1300RGBW -G1-830-04 ¹⁾	4.7 / 4.6 / 1.7 W ²⁾	17.9 W	23...25 V	25 V	24.0 V	69.80 W
LF1300RGBW -G1-865-04 ¹⁾	4.7 / 4.6 / 1.7 W ²⁾	17.4 W	23...24 V	25 V	24.0 V	67.90 W
LF700RGBW -G1-822-06 ¹⁾	2.8 / 2.6 / 1.1 W ²⁾	10.7 W	23...24 V	25 V	24.0 V	64.20 W
LF700RGBW -G1-827-06 ¹⁾	2.8 / 2.6 / 1.1 W ²⁾	9.8 W	23...24 V	25 V	24.0 V	58.80 W
LF700RGBW -G1-830-06 ¹⁾	2.8 / 2.6 / 1.1 W ²⁾	9.8 W	23...25 V	25 V	24.0 V	58.80 W
LF700RGBW -G1-865-06 ¹⁾	2.8 / 2.6 / 1.1 W ²⁾	9.6 W	23...24 V	25 V	24.0 V	57.6 W
LF1300RGBW -G1-840-04 ¹⁾	4.7 / 4.6 / 1.7 W ²⁾	17.4 W	23...25 V	25 V	24.0 V	67.90 W
LF700RGBW -G1-840-06 ¹⁾	2.8 / 2.6 / 1.1 W ²⁾	9.6 W	23...25 V	25 V	24.0 V	57.6 W

Product description	Type of current	Nominal current	Nominal wattage per meter - White
LF200C -G3-RGB-06 ¹⁾	DC	1.63 A	
LF05CA2 -RGB3 ¹⁾	DC	3 A	
LF05CE -RGB1	DC	1.6 A	
LF1300RGBW -G1-822-04 ¹⁾	DC	3.15 A	8.4 W
LF1300RGBW -G1-827-04 ¹⁾	DC	2.9 A	6.9 W
LF1300RGBW -G1-830-04 ¹⁾	DC	2.9 A	6.9 W
LF1300RGBW -G1-865-04 ¹⁾	DC	2.83 A	6.4 W
LF700RGBW -G1-822-06 ¹⁾	DC	2.675 A	4.2 W
LF700RGBW -G1-827-06 ¹⁾	DC	2.5 A	3.3 W
LF700RGBW -G1-830-06 ¹⁾	DC	2.5 A	3.3 W
LF700RGBW -G1-865-06 ¹⁾	DC	2.4 A	3.1 W
LF1300RGBW -G1-840-04 ¹⁾	DC	2.8 A	6.4 W

Product family datasheet

Product description	Type of current	Nominal current	Nominal wattage per meter - White
LF700RGBW -G1-840-06 ¹⁾	DC	2.4 A	3.1 W

¹⁾ See product remark

²⁾ R/G/B

Photometrical data

Product description	Luminous flux per meter	Luminous flux per meter	Luminous flux	Luminous flux per meter
LF200C -G3-RGB-06 ¹⁾	209 lm	209 lm	1254 lm	
LF05CA2 -RGB3 ¹⁾	470 lm	470 lm	1880 lm	
LF05CE -RGB1	209 lm	209 lm	1080 lm	
LF1300RGBW -G1-822-04 ¹⁾	493 lm	1213 lm		720 lm
LF1300RGBW -G1-827-04 ¹⁾	493 lm	1293 lm		800 lm
LF1300RGBW -G1-830-04 ¹⁾	493 lm	1293 lm		800 lm
LF1300RGBW -G1-865-04 ¹⁾	493 lm	1293 lm		800 lm
LF700RGBW -G1-822-06 ¹⁾	297 lm	657 lm		360 lm
LF700RGBW -G1-827-06 ¹⁾	297 lm	697 lm		400 lm
LF700RGBW -G1-830-06 ¹⁾	297 lm	697 lm		400 lm
LF700RGBW -G1-865-06 ¹⁾	297 lm	697 lm		400 lm
LF1300RGBW -G1-840-04 ¹⁾	493 lm	1293 lm		800 lm
LF700RGBW -G1-840-06 ¹⁾	297 lm	697 lm		400 lm

¹⁾ See product remark

Light technical data

Product description	Beam angle
LF200C -G3-RGB-06 ¹⁾	120 °
LF05CA2 -RGB3 ¹⁾	120 °
LF05CE -RGB1	120 °
LF1300RGBW -G1-822-04 ¹⁾	120 °
LF1300RGBW -G1-827-04 ¹⁾	120 °
LF1300RGBW -G1-830-04 ¹⁾	120 °
LF1300RGBW -G1-865-04 ¹⁾	120 °
LF700RGBW -G1-822-06 ¹⁾	120 °
LF700RGBW -G1-827-06 ¹⁾	120 °
LF700RGBW -G1-830-06 ¹⁾	120 °
LF700RGBW -G1-865-06 ¹⁾	120 °
LF1300RGBW -G1-840-04 ¹⁾	120 °
LF700RGBW -G1-840-06 ¹⁾	120 °

¹⁾ See product remark

Product family datasheet

LED module information

Product description	Number of LEDs per smallest unit
LF200C -G3-RGB-06 ¹⁾	5
LF05CA2 -RGB3 ¹⁾	5
LF05CE -RGB1	5
LF1300RGBW -G1-822-04 ¹⁾	12
LF1300RGBW -G1-827-04 ¹⁾	12
LF1300RGBW -G1-830-04 ¹⁾	12
LF1300RGBW -G1-865-04 ¹⁾	12
LF700RGBW -G1-822-06 ¹⁾	12
LF700RGBW -G1-827-06 ¹⁾	12
LF700RGBW -G1-830-06 ¹⁾	12
LF700RGBW -G1-865-06 ¹⁾	12
LF1300RGBW -G1-840-04 ¹⁾	
LF700RGBW -G1-840-06 ¹⁾	12

¹⁾ See product remark

Dimensions & weight


Product description	Length	Length – smallest unit	Width	Height
LF200C -G3-RGB-06 ¹⁾	6000 mm ²⁾	150.0 mm	8.0 mm	2.2 mm
LF05CA2 -RGB3 ¹⁾	4000 mm	100.0 mm	8.0 mm	2.2 mm
LF05CE -RGB1	6000 mm ²⁾	150.0 mm	8.0 mm	2.2 mm
LF1300RGBW -G1-822-04 ¹⁾	3900 mm	100.0 mm	10.0 mm	1.4 mm
LF1300RGBW -G1-827-04 ¹⁾	3900 mm	100.0 mm	10.0 mm	1.4 mm
LF1300RGBW -G1-830-04 ¹⁾	3900 mm	100.0 mm	10.0 mm	1.4 mm
LF1300RGBW -G1-865-04 ¹⁾	3900 mm	100.0 mm	10.0 mm	1.4 mm
LF700RGBW -G1-822-06 ¹⁾	6000 mm	150.0 mm	10.0 mm	1.4 mm
LF700RGBW -G1-827-06 ¹⁾	6000 mm	150.0 mm	10.0 mm	1.4 mm
LF700RGBW -G1-830-06 ¹⁾	6000 mm	150.0 mm	10.0 mm	1.4 mm
LF700RGBW -G1-865-06 ¹⁾	6000 mm	150.0 mm	10.0 mm	1.4 mm
LF1300RGBW -G1-840-04 ¹⁾	3900 mm	100.0 mm	10.0 mm	1.4 mm
LF700RGBW -G1-840-06 ¹⁾	6000 mm	150.0 mm	10.0 mm	1.4 mm

¹⁾ See product remark


²⁾ LED pitch 30 mm

Product family datasheet

Product line drawing

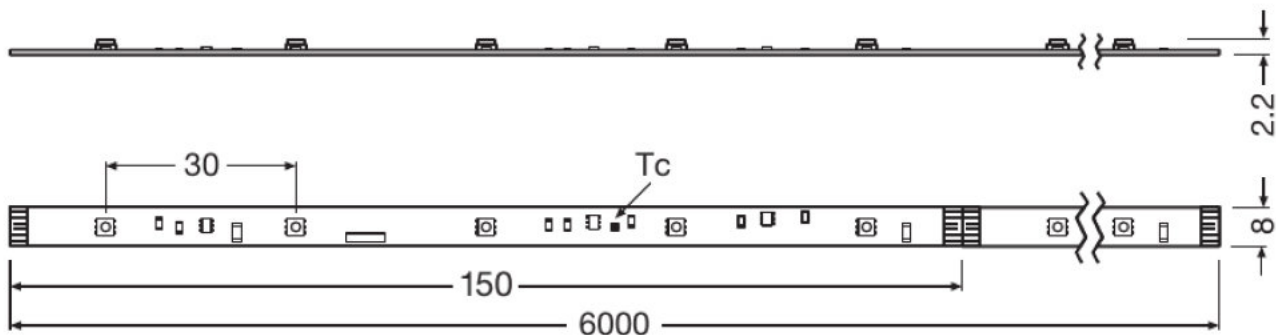


LF200C -G3-RGB-06, LF05CE -RGB1

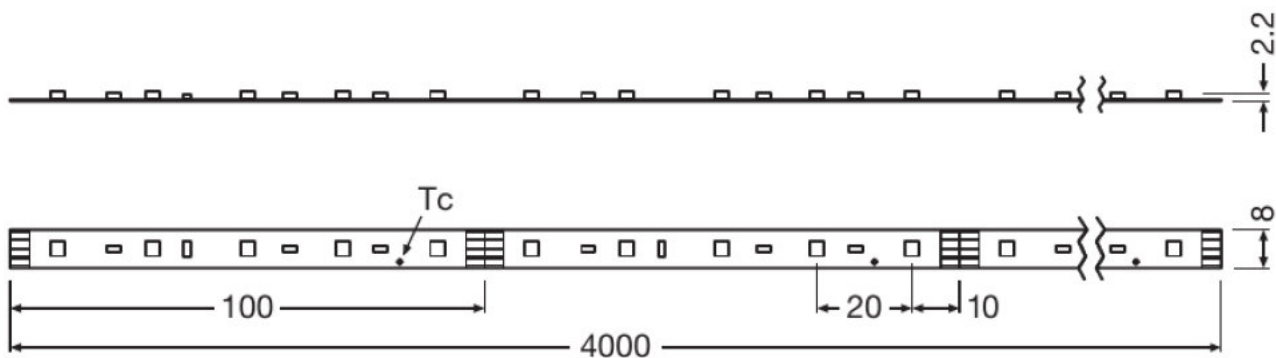


LF05CA2 -RGB3

Product family datasheet

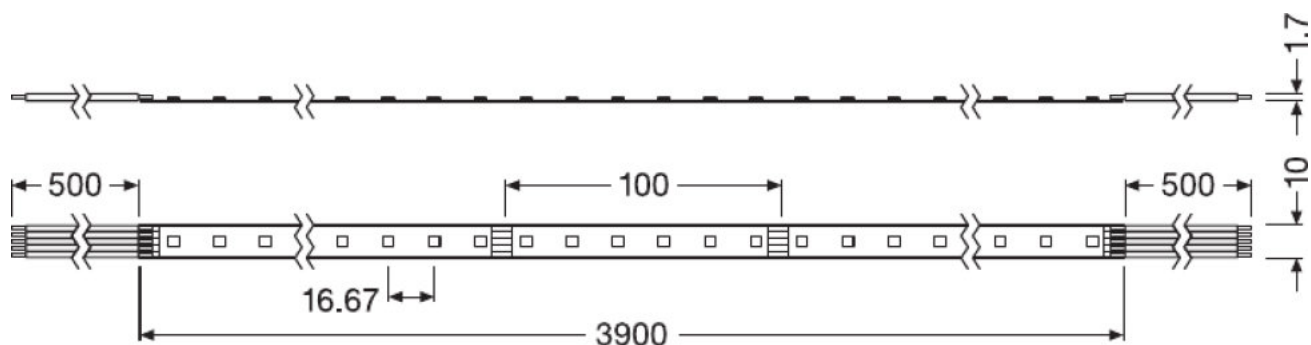

LF1300RGBW -G1-822-04, LF1300RGBW -G1-827-04, LF1300RGBW -G1-830-04, LF1300RGBW -G1-865-04, LF1300RGBW -G1-840-04

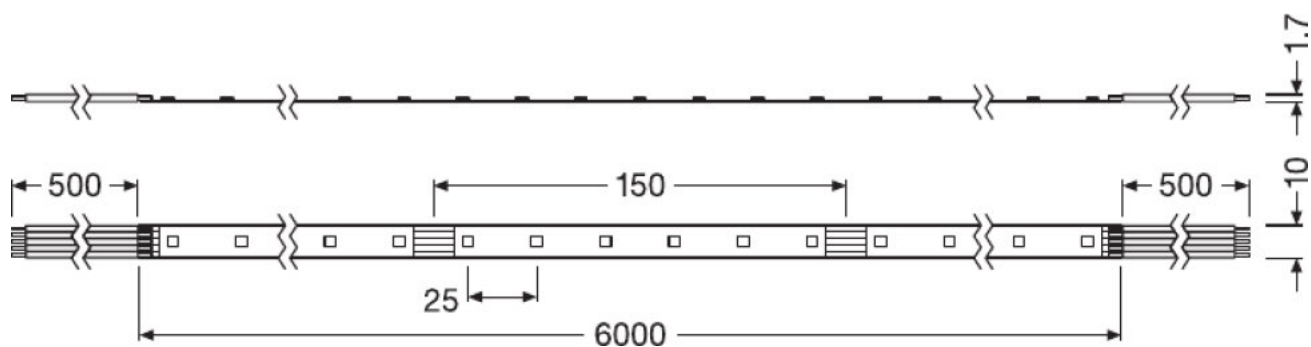

LF700RGBW -G1-822-06, LF700RGBW -G1-827-06, LF700RGBW -G1-830-06, LF700RGBW -G1-865-06, LF700RGBW -G1-840-06

Product family datasheet

Temperatures & operating conditions

Product description	Temperature range at storage	Temperature range in operation at T _c point
LF200C -G3-RGB-06 ¹⁾	-40...85 °C	-20...75 °C ²⁾
LF05CA2 -RGB3 ¹⁾	-40...85 °C	-30...75 °C ³⁾
LF05CE -RGB1	-40...85 °C	-30...75 °C ²⁾
LF1300RGBW -G1-822-04 ¹⁾	-40...85 °C	-20...85 °C ²⁾
LF1300RGBW -G1-827-04 ¹⁾	-40...85 °C	-20...85 °C ²⁾
LF1300RGBW -G1-830-04 ¹⁾	-40...85 °C	-20...85 °C ²⁾
LF1300RGBW -G1-865-04 ¹⁾	-40...85 °C	-20...85 °C ²⁾
LF700RGBW -G1-822-06 ¹⁾	-40...85 °C	-20...85 °C ²⁾
LF700RGBW -G1-827-06 ¹⁾	-40...85 °C	-20...85 °C ²⁾
LF700RGBW -G1-830-06 ¹⁾	-40...85 °C	-20...85 °C ²⁾
LF700RGBW -G1-865-06 ¹⁾	-40...85 °C	-20...85 °C ²⁾
LF1300RGBW -G1-840-04 ¹⁾	-40...85 °C	-20...85 °C ²⁾
LF700RGBW -G1-840-06 ¹⁾	-40...85 °C	-20...85 °C ²⁾

¹⁾ See product remark

²⁾ Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.

³⁾ At the T_c point

Lifespan

Product description	Lifespan
LF200C -G3-RGB-06 ¹⁾	50000 h
LF05CA2 -RGB3 ¹⁾	50000 h
LF05CE -RGB1	50000 h
LF1300RGBW -G1-822-04 ¹⁾	60000 h
LF1300RGBW -G1-827-04 ¹⁾	60000 h
LF1300RGBW -G1-830-04 ¹⁾	60000 h
LF1300RGBW -G1-865-04 ¹⁾	60000 h
LF700RGBW -G1-822-06 ¹⁾	60000 h
LF700RGBW -G1-827-06 ¹⁾	60000 h
LF700RGBW -G1-830-06 ¹⁾	60000 h
LF700RGBW -G1-865-06 ¹⁾	60000 h
LF1300RGBW -G1-840-04 ¹⁾	60000 h
LF700RGBW -G1-840-06 ¹⁾	60000 h

¹⁾ See product remark

Product family datasheet

Capabilities

Product description	Dimmable
LF200C -G3-RGB-06 ¹⁾	Yes
LF05CA2 -RGB3 ¹⁾	Yes
LF05CE -RGB1	Yes ²⁾
LF1300RGBW -G1-822-04 ¹⁾	Yes
LF1300RGBW -G1-827-04 ¹⁾	Yes
LF1300RGBW -G1-830-04 ¹⁾	Yes
LF1300RGBW -G1-865-04 ¹⁾	Yes
LF700RGBW -G1-822-06 ¹⁾	Yes
LF700RGBW -G1-827-06 ¹⁾	Yes
LF700RGBW -G1-830-06 ¹⁾	Yes
LF700RGBW -G1-865-06 ¹⁾	Yes
LF1300RGBW -G1-840-04 ¹⁾	Yes
LF700RGBW -G1-840-06 ¹⁾	Yes

¹⁾ See product remark

²⁾ PWM

Certificates & standards

Product description	Standards
LF200C -G3-RGB-06 ¹⁾	CE/EAC/UL Recognized component according UL 8750
LF05CA2 -RGB3 ¹⁾	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF05CE -RGB1	CE
LF1300RGBW -G1-822-04 ¹⁾	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1300RGBW -G1-827-04 ¹⁾	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1300RGBW -G1-830-04 ¹⁾	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1300RGBW -G1-865-04 ¹⁾	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF700RGBW -G1-822-06 ¹⁾	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF700RGBW -G1-827-06 ¹⁾	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF700RGBW -G1-830-06 ¹⁾	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF700RGBW -G1-865-06 ¹⁾	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1300RGBW -G1-840-04 ¹⁾	UL/EAC/CE; ENEC 10 VDE
LF700RGBW -G1-840-06 ¹⁾	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750

¹⁾ See product remark

Product family datasheet

Logistical data

Product description	Commodity code
LF200C -G3-RGB-06 ¹⁾	940540399000
LF05CA2 -RGB3 ¹⁾	940540399000
LF05CE -RGB1	940540399000
LF1300RGBW -G1-822-04 ¹⁾	940540399000
LF1300RGBW -G1-827-04 ¹⁾	940540399000
LF1300RGBW -G1-830-04 ¹⁾	940540399000
LF1300RGBW -G1-865-04 ¹⁾	940540399000
LF700RGBW -G1-822-06 ¹⁾	940540399000
LF700RGBW -G1-827-06 ¹⁾	940540399000
LF700RGBW -G1-830-06 ¹⁾	940540399000
LF700RGBW -G1-865-06 ¹⁾	940540399000
LF1300RGBW -G1-840-04 ¹⁾	940540399000
LF700RGBW -G1-840-06 ¹⁾	940540399000

¹⁾ See product remark

Product remark

Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information (see www.osram.com/led-systems),/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values/Full single bin on white and each color/With RGB wavelengths: R/G/B 622/534/485 nm

Equipment / Accessories

- Simplified connection with optional matching CONNECTsystem for RGB
- Quick installation with optional SLIM TRACK System
- Perfectly matched to OPTOTRONIC 24 V electronic control gears

Application advice

For more detailed application information and graphics please see product datasheet.

Product family datasheet

Additional product information

- Some LED modules are equipped with a self-adhesive tape for attaching the LED module to suitable materials, such as aluminum profiles, which must be clean and free of oil or silicone coatings, as well as other dirt/dust particles. The adhesive tape is intended for single use and if removed may damage the material to which it is stuck and the LED module itself, which must then be scrapped. Use the adhesive tape when the installation material temperature is in the 18 °C...35 °C range. Complete adhesion takes up to 72 h.
- LED modules are designed for static installations in accordance with IPC 6013C – Use A. Take material vibrations, repetitive torsion, and elongation/compression into account.
- If the operating environment covers a broad temperature range (e.g. outdoor applications) and the operating length is longer than 2 m, the use of adequate mounting surfaces is required. The use of an additional thicker adhesive tape between LED module and mounting surface is also recommended in order to absorb the stress of any mismatch in expansion. Assure enough space for module expansion with increasing temperature.
- The manufacturer is not responsible for damage due to chemical corrosion. The user must provide suitable protection against corrosive agents such as moisture and condensation and any other harmful elements/compounds. Make certain to avoid corrosive atmospheres. According to the current state of LED technology, hydrogen sulfide (H₂S) causes accelerated corrosion which leads to shortened lifetime or premature failure. Sources of H₂S may be rubber, foam rubber, soft-foam tapes, rubber-based sealing, natural sources (e.g. sulfur springs), etc. To avoid H₂S from sulfur-vulcanized rubber use silicon-based materials or peroxide-crosslinked rubber instead. Follow the recommendations in the material datasheet of the rubber supplier.
- IP00 LED modules, as manufactured, have no conformal coating and therefore offer no inherent protection against corrosion. Conformal coating treatment is possible, however materials must be selected properly in order to avoid product damage or impaired performance; the user must also completely seal the cut parts (ends/edges).
- For applications involving exposure to humidity and dust the module must be protected by a fixture or housing with a suitable IP protection class.
- Consult OSRAM Technical Service for further advice.
- Only a qualified electrician may install the module.
- Handle with care and ensure that there is no mechanical product damage, including damage to invisible internal electronics parts.
- Exceeding maximum operating and storage temperature ratings can reduce the expected lifetime or even destroy the LED module. The temperature of the LED module must be measured at the T_c-point in accordance with EN 60598-1 under steady-state conditions, considering the worst case; drive all channels at 100 % power. Refer to the product drawing for the exact location of the T_c-point.
- Exceeding the maximum ratings for the operating voltage causes hazardous overload and will likely destroy the LED module.
- Installation of LED modules and connection to the power supply must comply with all applicable electrical and safety standards.
- Observe correct polarity and wiring diagrams! Incorrect polarity or wrong wiring can cause unpredictable permanent damage or even failure of the product.
- Never exceed the maximum operable length, including daisy-chaining connections.
- Always ensure electrical isolation between the LED module and the mounting surface, especially in the vicinity of connections or cut ends.
- IP00 LED modules are ESD-sensitive; take adequate precautions during installation and operation of the products.
- Use only SELV LED drivers in accordance with applicable lighting standards and LED module ratings. In order to safely operate OSRAM LED modules it is necessary to supply them with an electronically stabilized power supply providing protection against short circuits, overload and overheating. To simplify the approval process of the luminaire/installation, the electronic power supplies control gear for LED modules must bear the CE and ENEC marking. In Europe the Declarations of Conformity must include at least the following standards: EN 61347-2-13, EN 55015, EN 61547 and EN 61000-3-2. ENEC certification will be based on EN 61347-2-13 and EN 62384. OSRAM OPTOTRONIC LED drivers comply with all relevant standards and guarantee safe operation; see the relevant brochure for more detailed information about OSRAM OPTOTRONIC.
- Avoid installations in rural and urban areas with high industrial activity and heavy traffic (higher than class than 4C1 according IEC 60721-3) and as well as installation in spa, areas with chlorine atmosphere, direct exposure to blown sand.

Sales and Technical Support

















Product family datasheet

Sales and Technical Support www.osram.com














Country specific information

Product description	Product code	METEL-Code	SEG-No.	STK number	UK Org
LF05CA2 -RGB3	4008321851536	-	-	4030217	-
LF05CE -RGB1	4008321593375	OSRLF05CERGB1	-	4031372	-
























Download Data

File	
	Brochures Light is freedom of design (EN)
	Certificates EAC Certificate
	Certificates UL Certificate
	Declarations of conformity Manufacturer declaration
	Declarations of conformity Declaration of conformity
	Eulumdat Eulumdat LF200C-G3-RGB-06 All
	Eulumdat Eulumdat LF200C-G3-RGB-06 Blue
	Eulumdat Eulumdat LF200C-G3-RGB-06 Green
	Eulumdat Eulumdat LF200C-G3-RGB-06 Red
	IES data IES data LF200C-G3-RGB-06 All
	IES data IES data LF200C-G3-RGB-06 Blue
	IES data IES data LF200C-G3-RGB-06 Green
	IES data IES data LF200C-G3-RGB-06 Red
	Product Datasheet 343462_LF05CA2 - Technical Datasheet
	Brochures 602876_LINEARlight Colormix Flex and LINEARlight Colormix Flex Protect - Quick installation guide
	Certificates UL Certificate

Product family datasheet

	Certificates VDE-ENEC Certificate
	Declarations of conformity Declaration of conformity
	Declarations of conformity Manufacturer declaration
	Operating instructions 383685_LF05CA2 - User Manual
	Eulumdat 346256_20121105 D012850 LF05CA2
	Eulumdat 346257_LF05CA2 D012849 LDT
	Eulumdat 346258_LF05CA2 D012848 LDT
	Product Datasheet 335845_LINEARlight Colormix Flex LF05C (EN)
	Declarations of conformity 485561_EC-DoC LF05CACE
	Declarations of conformity 485562_Manufacturers-DoC LF05CACE
	User instruction LINEARlight Flex
	Product Datasheet LINEARlight FLEX Colormix RGBW Specification Sheet (EN)
	Certificates ENEC10_VDE Certificate
	Certificates UL Certificate
	Certificates CB TEST CERTIFICATE DE1-59711
	Declarations of conformity Declaration of Conformity
	Declarations of conformity Manufacturers Declaration of Conformity
	Eulumdat Eulumdat LF1300RGBW-G1-822-04
	Eulumdat Eulumdat LF1300RGBW-G1-8xx-04 Blue
	Eulumdat Eulumdat LF1300RGBW-G1-8xx-04 Green
	Eulumdat Eulumdat LF1300RGBW-G1-8xx-04 Red
	IES data IES data LF1300RGBW-G1-822-04
	IES data IES data LF1300RGBW-G1-8xx-04 Blue

Product family datasheet

	IES data IES data LF1300RGBW-G1-8xx-04 Green
	IES data IES data LF1300RGBW-G1-8xx-04 Red
	Eulumdat Eulumdat LF1300RGBW-G1-827-04
	IES data IES data LF1300RGBW-G1-827-04
	Eulumdat Eulumdat LF1300RGBW-G1-830-04
	IES data IES data LF1300RGBW-G1-830-04
	Eulumdat Eulumdat LF1300RGBW-G1-865-04
	IES data IES data LF1300RGBW-G1-865-04
	Eulumdat Eulumdat LF700RGBW-G1-822-06
	Eulumdat Eulumdat LF700RGBW-G1-8xx-06 Blue
	Eulumdat Eulumdat LF700RGBW-G1-8xx-06 Green
	Eulumdat Eulumdat LF700RGBW-G1-8xx-06 Red
	IES data IES data LF700RGBW-G1-822-06
	IES data IES data LF700RGBW-G1-8xx-06 Blue
	IES data IES data LF700RGBW-G1-8xx-06 Green
	IES data IES data LF700RGBW-G1-8xx-06 Red
	Eulumdat Eulumdat LF700RGBW-G1-827-06
	IES data IES data LF700RGBW-G1-827-06
	Eulumdat Eulumdat LF700RGBW-G1-830-06
	IES data IES data LF700RGBW-G1-830-06
	Eulumdat Eulumdat LF700RGBW-G1-865-06
	IES data IES data LF700RGBW-G1-865-06
	Eulumdat Eulumdat LF1300RGBW-G1-840-04

Product family datasheet



IES data
IES data LF1300RGBW-G1-840-04



Eulumdat
Eulumdat LF700RGBW-G1-840-06



IES data
IES data LF700RGBW-G1-840-06

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899501997	LF200C -G3-RGB-06	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1253.00 g
4008321851536	LF05CA2 -RGB3	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1515.00 g
4008321593375	LF05CE -RGB1	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1514.84 g
4052899525061	LF1300RGBW -G1-822-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1845.00 g
4052899525122	LF1300RGBW -G1-827-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1845.00 g
4052899525146	LF1300RGBW -G1-830-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1845.00 g
4052899525184	LF1300RGBW -G1-865-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1845.00 g
4052899525221	LF700RGBW -G1-822-06	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	2045.00 g
4052899525269	LF700RGBW -G1-827-06	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	2045.00 g
4052899525306	LF700RGBW -G1-830-06	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	2045.00 g
4052899525344	LF700RGBW -G1-865-06	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	2045.00 g
4052899540620	LF1300RGBW -G1-840-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1845.00 g
4052899540668	LF700RGBW -G1-840-06	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	2045.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Accessories Mandatory

Product description	Accessory name	Accessory code
LF05CE -RGB1	LF -4PIN FLEX	▶ 4008321514585

Product family datasheet

Accessories Optional

Product description	Accessory name	Accessory code
LF05CA2 -RGB3	LF-LTS -2100	▶ 4008321978981
LF05CA2 -RGB3	LF -WIRE-30 FLEX SC	▶ 4008321875587
LF05CA2 -RGB3	LF -WIRE-150 FLEX SC	▶ 4008321875563
LF05CA2 -RGB3	FX -SC08-G2--CT4PF-0500	▶ 4052899464797
LF05CA2 -RGB3	FX -SC08-G2--CT4PF-1000	▶ 4052899464827
LF05CA2 -RGB3	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF05CA2 -RGB3	FX -SC08-G1-FW4P-LIN-0300	▶ 4052899469259
LF05CE -RGB1	LF-LTS -2100	▶ 4008321978981

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.